

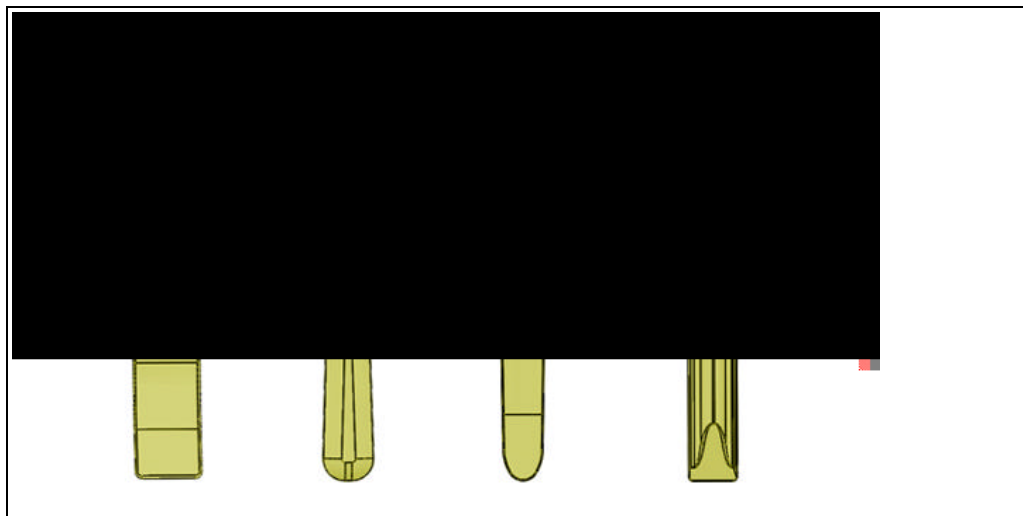
**REMOVAL - REFITTING : FRONT MUD GUARD :****1. Recommended tools**

Figure : E5AP30WD

[1] Stripping tool (-).1350-ZZ .

**2. Removal****2.1. On the driver's side**

Place the vehicle on a 2 -post lift .

Remove the front wheels .

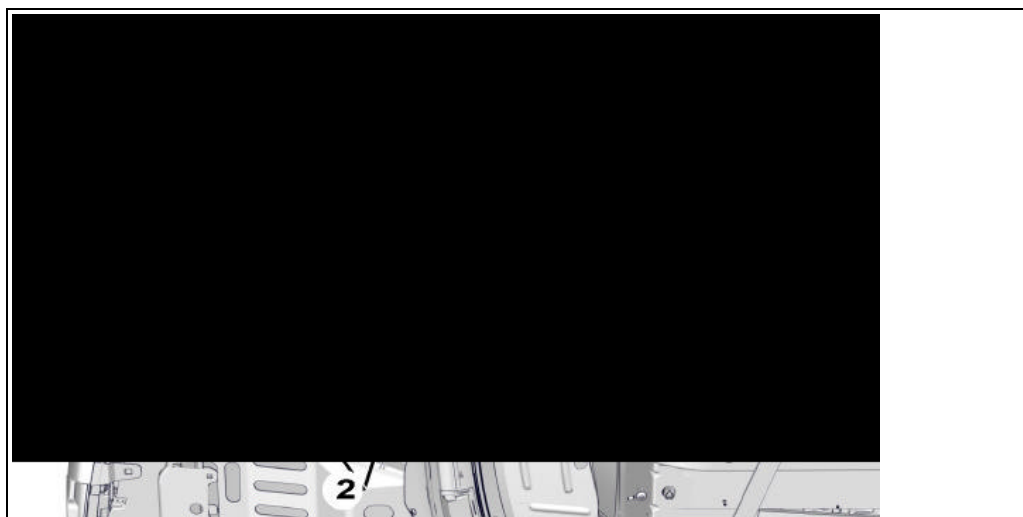


Figure : C5JM00WD

Unclip the clips (3) ; Using the tool [1] .

Remove :

- The bolts (2)
- The mud shield (1)

## 2.2. Passenger's side

Proceed in the same way to remove the splash shield on the passenger's side .

## 3. Refitting

Proceed in the reverse order to removal .

Fit the wheels ; Tightening to  $10 \pm 1$  daN.m .

**N.B.** : Check the condition of the securing clips ; Replace if necessary .