

REMOVAL - REFITTING : POLLEN FILTER :

1. Removal

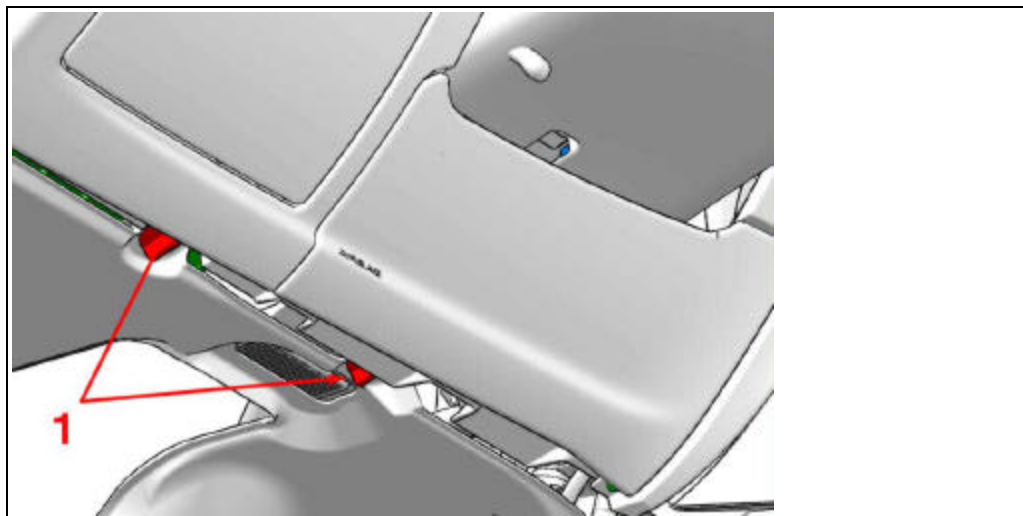


Figure : C5HKFD7D

Remove : The fixings (1) a quarter turn .

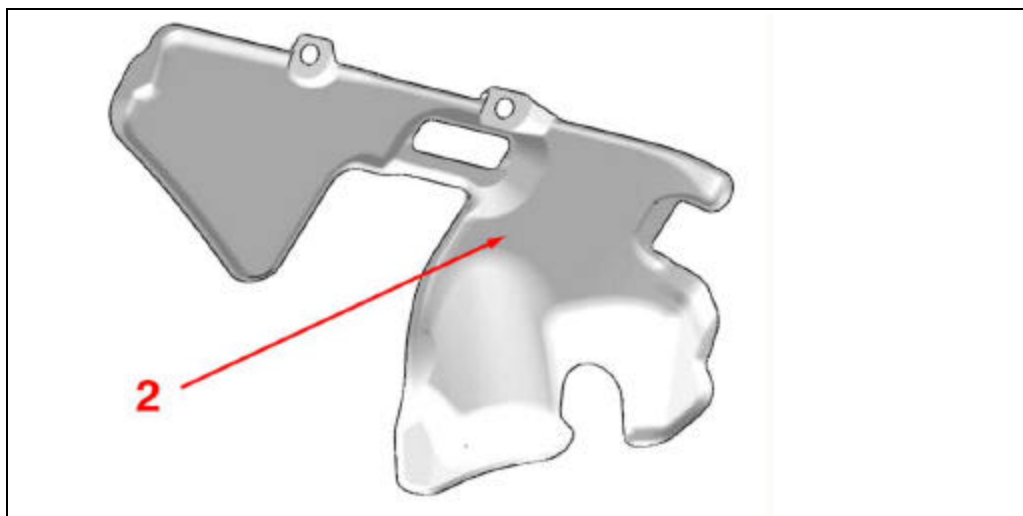


Figure : C5HKFD8D

Remove the cover (2) .

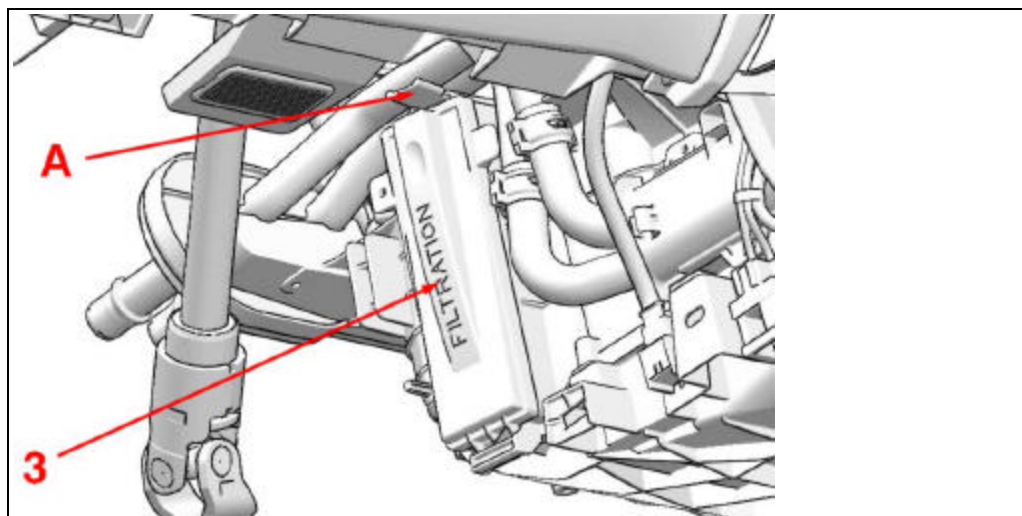


Figure : C5HKFD9D

Unlock the bonnet (At (A)) .

Remove the cover (3) .

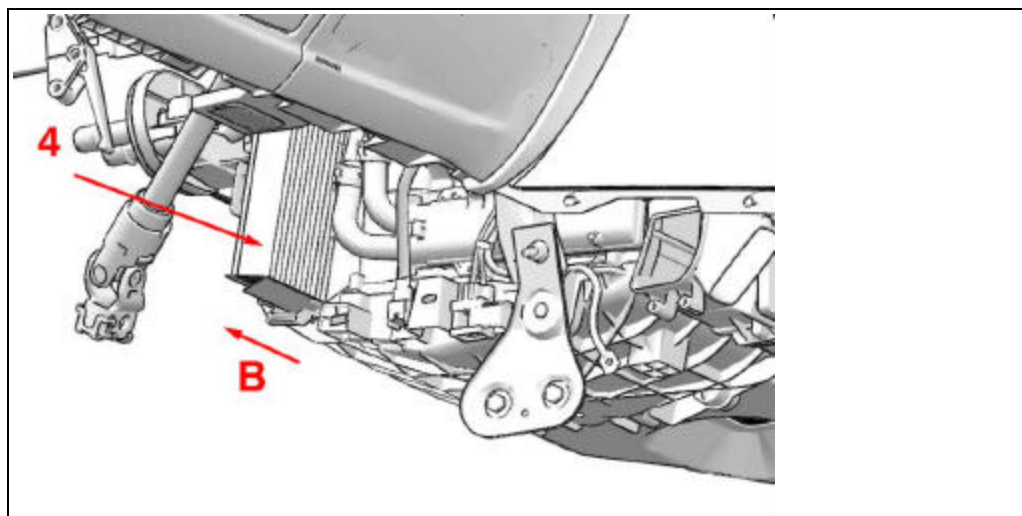


Figure : C5HKFDAD

Remove the filter (4) in the direction of the arrow (B) (Pull) .

N.B. : It is necessary to play on the flexibility of the filter in order to be able to extract it .

2. Refitting

Proceed in the reverse order to removal .