REMOVAL - REFITTING : HEADLINING :

5 DOOR SALOON OR 3 DOOR SALOON

1. Recommended tools

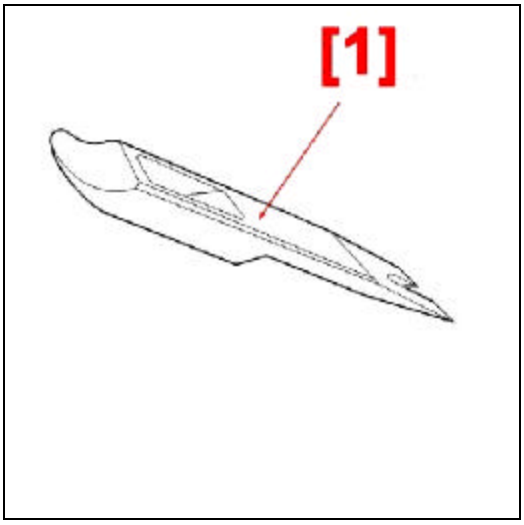


Figure : E5AP07XC

[1] Release plate (-).1330-E .

2. Removal

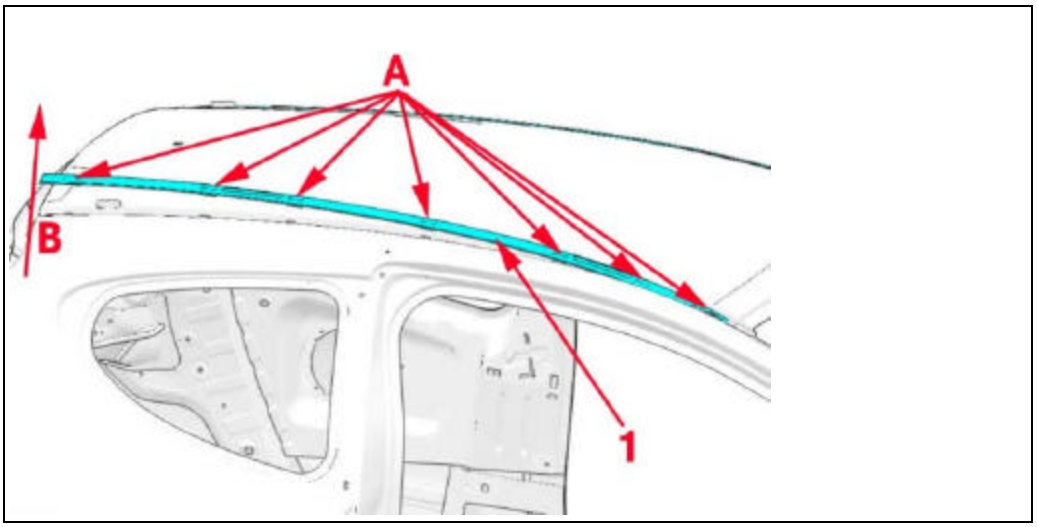


Figure : C4DK0GMD

Using the tool [1], unclip following (B) the clips in (A) of the roof trim (1) starting at the rear of the vehicle .
Remove the roof trim (1) .

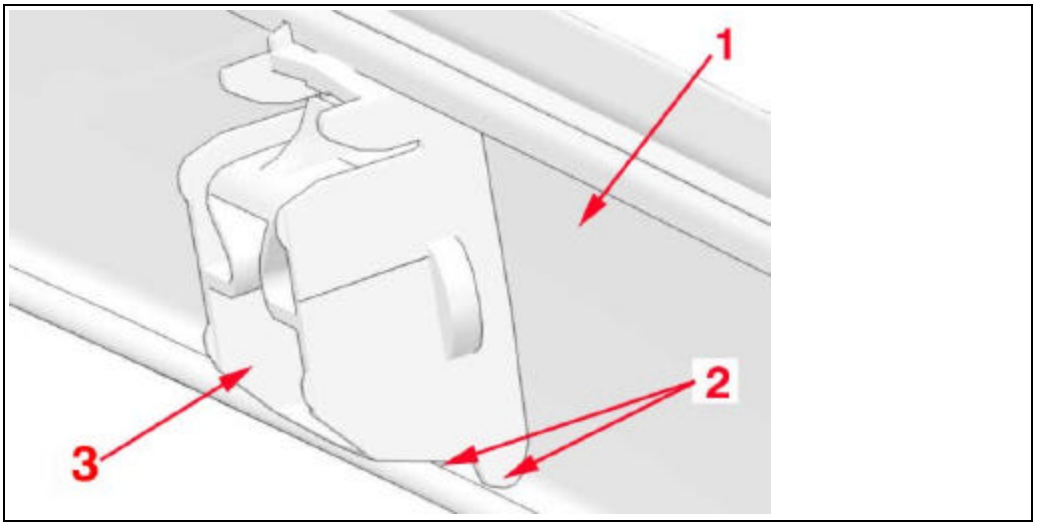


Figure : C4DK0GND

Release the pins (2) from the roof trim (3) clip (1) (Using a thin screwdriver) .
Remove the clip (3) .

N.B. : Proceed in the same way for the 7 clips .

N.B. : Provide for replacement of the roof trim clips .

3. Refitting

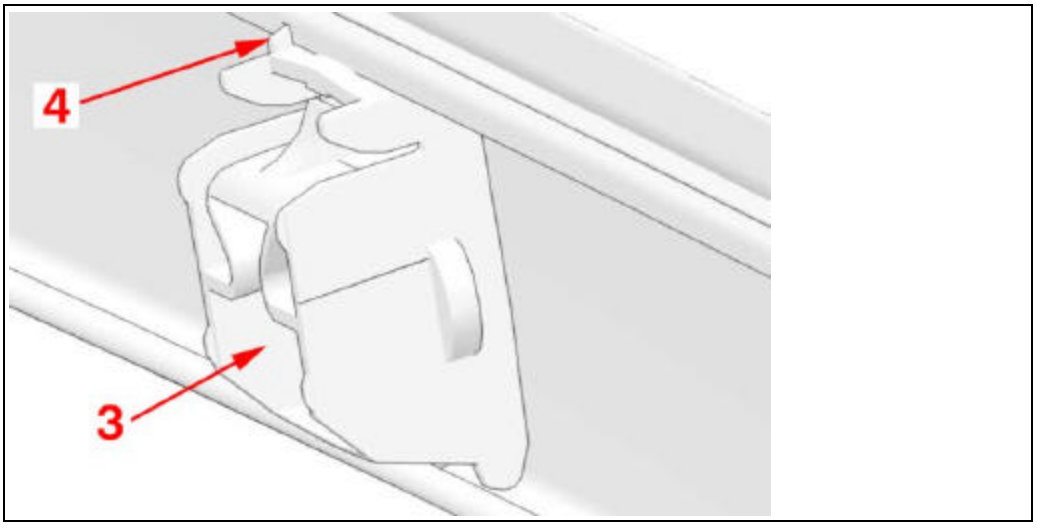


Figure : C4DK0GPD

Refit the clip (3) using the notch (4) .

N.B. : Proceed in the same way for the 7 clips .

Proceed in the reverse order to removal .