REMOVAL - REFITTING : FRONT MUD GUARD :

1. Recommended tools

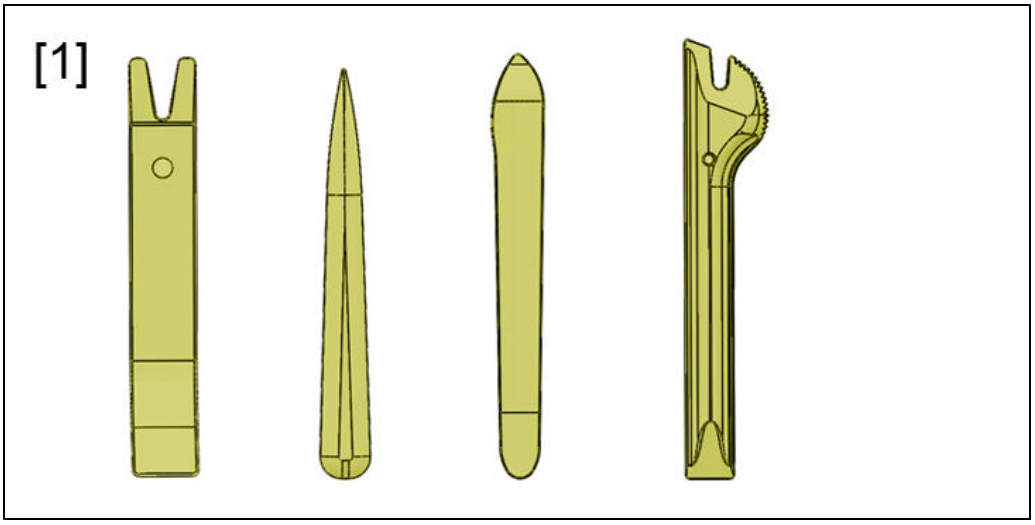


Figure : E5AP30WD

[1] Stripping tool (-).1350-ZZ .

2. Removal

2.1. On the driver's side

Place the vehicle on a 2 -post lift .
Remove the front wheels .

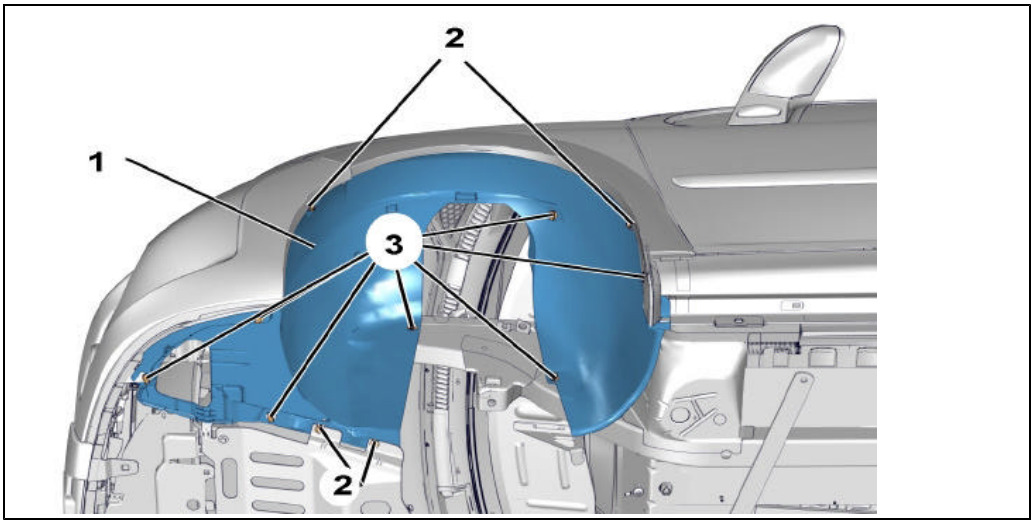


Figure : C5JM00WD

Unclip the clips (3) ; Using the tool [1] .
Remove :

- The bolts (2)
- The mud shield (1)

2.2. Passenger's side

Proceed in the same way to remove the splash shield on the passenger's side .

3. Refitting

Proceed in the reverse order to removal .
Fit the wheels ; Tightening to 10 ± 1 daN.m .

N.B. : Check the condition of the securing clips ; Replace if necessary .