


ISSUED BY


www.rototest.com/rri

Rototest
 Salemsv 20
 SE-144 40 Ronninge
 Sweden
 Tel +46 8 532 55 890
 Fax +46 8 532 52 740
 info@rototest.se

Certificate of Performance

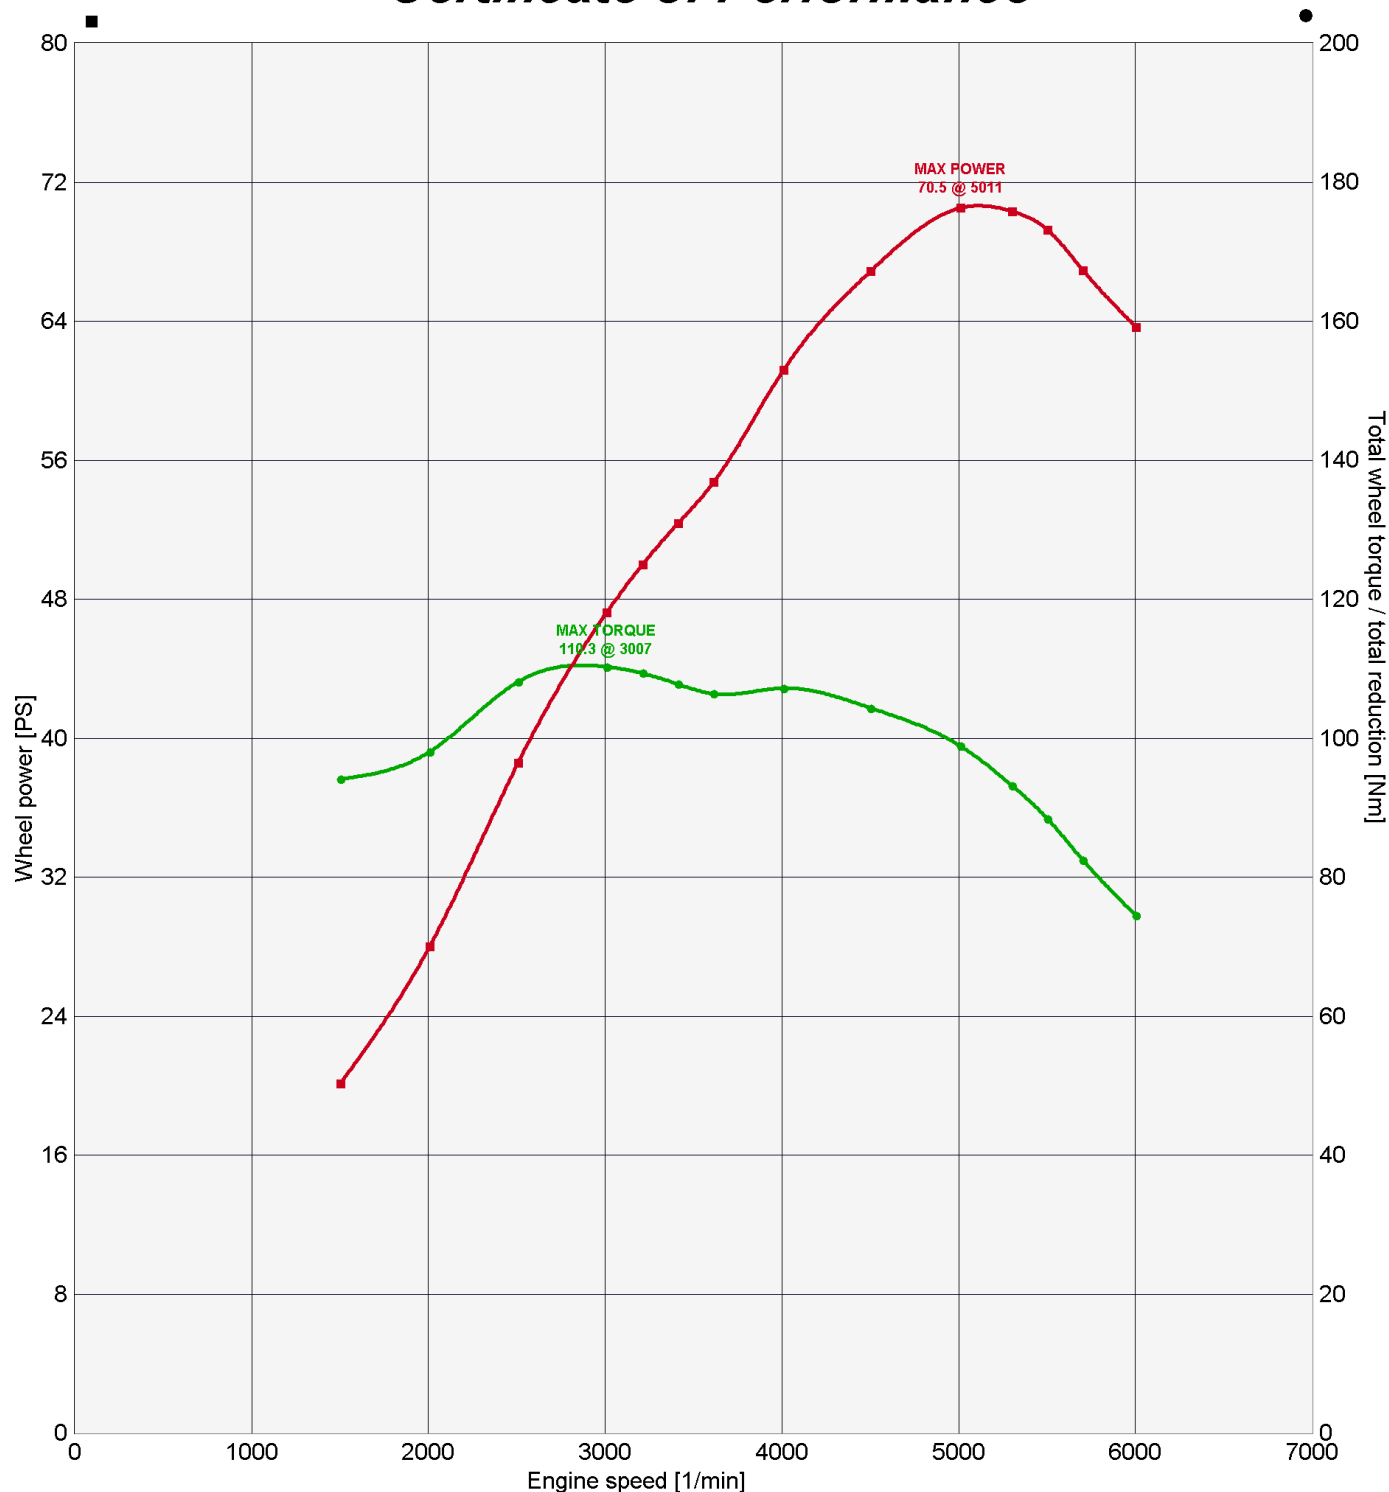

Vehicle	Description	Mode	Correction	Legend
Peugeot 206 1.4 -00 (55 kW)		Steady State	ISO 1585 (5/82)	■ ●

Printed 12/05/2006 17:23


995645

ROTOTEST VPA / VPA-R chassis dynamometer system | www.rototest.comDownloaded from www.rototest.com/rri on 2009-10-06 07:36 by 194.102.139.216

(c) Copyright Rototest Research Institute. All rights reserved. For limited non-profit use, see terms at www.rototest.com/rri.
 Performance graphs are available as high resolution images. Please contact RRI for more information.



ISSUED BY


www.rototest.com/rri


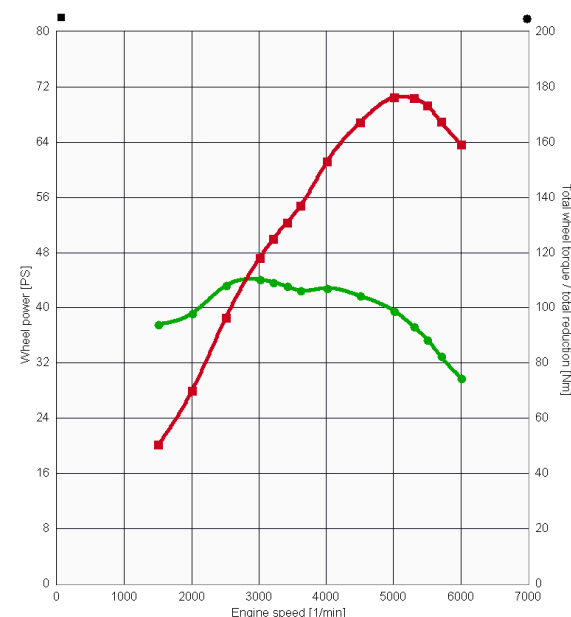
Rototest
 Salemsv 20
 SE-144 40 Ronninge
 Sweden
 Tel +46 8 532 55 890
 Fax +46 8 532 52 740
 info@rototest.se

Certificate of Performance

Test ID STR-00111401
 Created 2000-11-14 11:10
 Vehicle ID
 Vehicle make Peugeot
 Vehicle model 206 1.4 -00 (55 kW)
 Engine SI NA, 1361 cc, I4, 8v
 Mileage 1958 km
 Test mode Steady State
 Test fuel 95 RON
 Customer
 Description

Measured at [1/min]
 Max power [PS] 70.5 5011
 Max torque [Nm] 110.3 3007
 Correction ISO 1585 (5/82)
 Atm pressure [hPa] 995 - 996

Comments



Engine speed [1/min]	Corr power [PS]	Corr torque [Nm]	Wheel speed [1/min]	Total red [1/x]	Total wheel torque / total red [Nm]	Wheel power [PS]	Inl temp* [°C]	Rel hum [%]	Amb temp [°C]	Oil temp* [°C]	Sample Corr factor	Time [s]
1502	20.1	94.1	379	3.961	371	20.1	25	41	19	91	1.004	84.1
2008	28.0	98.0	507	3.961	388	28.0	24	43	19	94	1.002	63.2
2506	38.6	108.1	633	3.961	427	38.5	24	43	18	96	1.002	46.5
3007	47.2	110.3	759	3.961	436	47.1	24	43	18	98	1.002	38.1
3210	50.0	109.3	810	3.961	431	49.8	25	43	18	100	1.004	36.1
3414	52.4	107.8	862	3.961	425	52.2	24	43	19	100	1.003	33.8
3615	54.7	106.4	912	3.961	420	54.6	24	42	19	101	1.003	32.6
4009	61.2	107.2	1012	3.961	422	60.9	25	42	19	103	1.005	31.6
4503	66.9	104.3	1137	3.961	411	66.5	25	42	19	103	1.005	27.9
5011	70.5	98.9	1265	3.961	390	70.2	25	42	19	103	1.005	24.8
5301	70.3	93.2	1338	3.961	368	70.1	24	43	18	105	1.003	23.7
5503	69.3	88.4	1389	3.961	349	69.0	24	42	19	106	1.003	23.0
5704	66.9	82.4	1440	3.961	325	66.7	24	42	19	107	1.003	22.9
6004	63.7	74.5	1516	3.961	294	63.5	24	43	19	106	1.003	21.6

* Inl temp measured in intake before air filter, oil temp measured in oil dipstick, unless noted otherwise.

Printed 12/05/2006 17:23

995645

ROTOTEST VPA / VPA-R chassis dynamometer system | www.rototest.com

