
4x4 Lightweight Cargo Truck

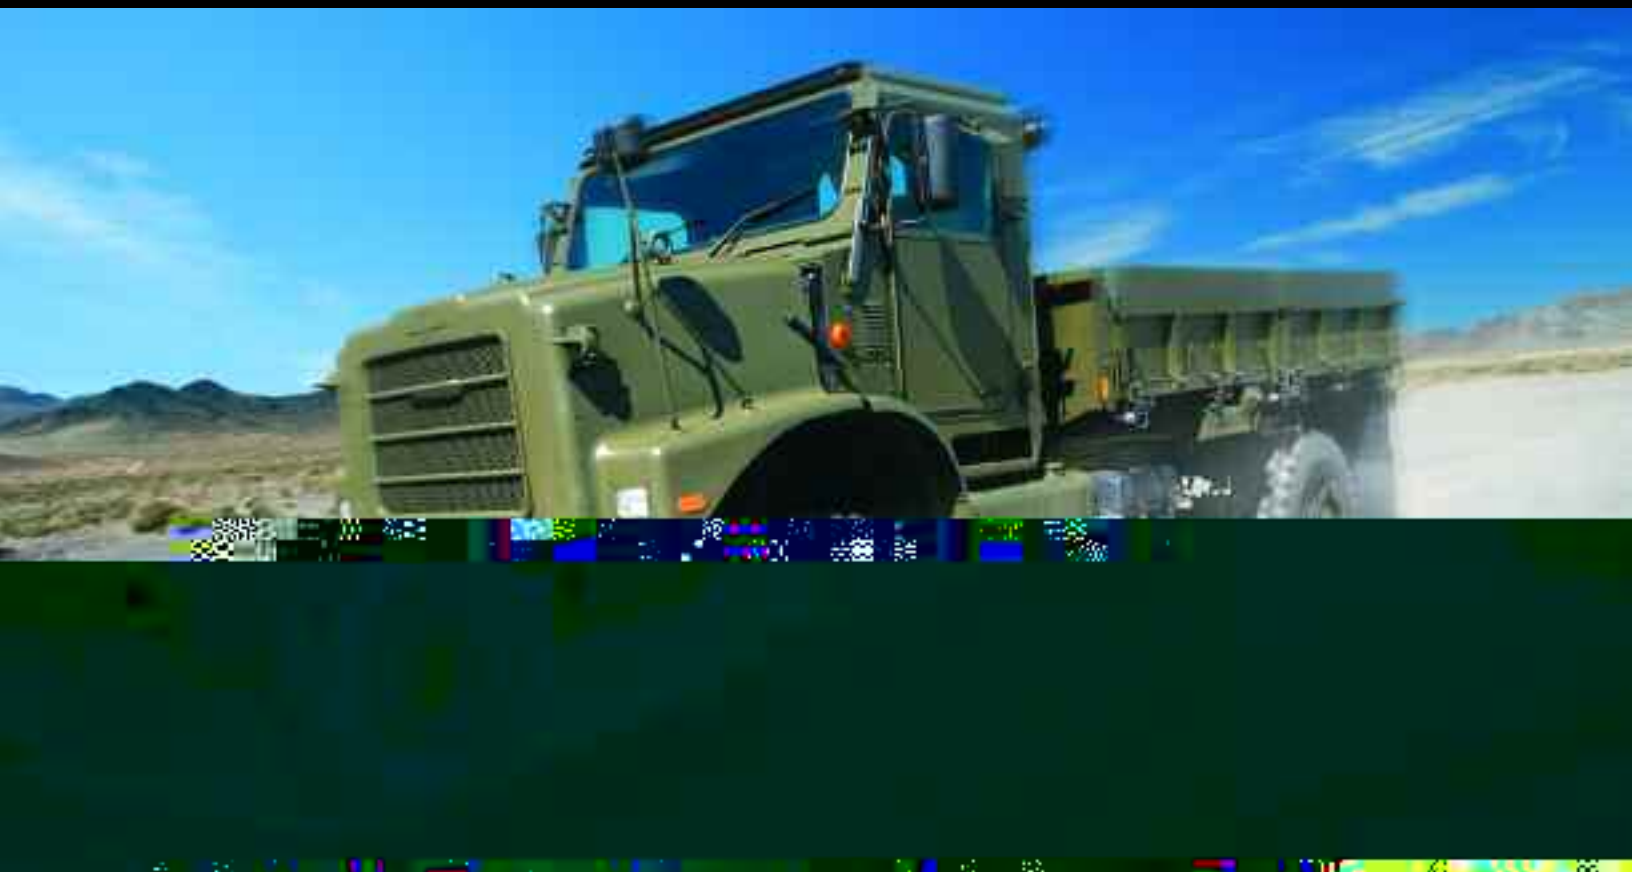

Performance. Maneuverability. Reliability. That's the Oshkosh Defense® 4 x 4 Lightweight Cargo Truck. When the mission demands quick reflexes, short reaction time and high performance. Count on the lightweight 4 x 4 to respond with agility.

The 4 x 4 Lightweight Cargo Truck boasts extreme off-road capabilities and a 6-ton payload. Built utilizing a proven Oshkosh Defense chassis as its foundation, it is easily produced and readily available, able to be manufactured in the United States or in cooperative agreements overseas. With add-on armor also available, it helps keep soldiers out of harm's way while maneuvering quickly and swiftly through any type of terrain.

The 4 x 4 Lightweight Cargo Truck is a member of the Oshkosh family of vehicles, and it has the same Oshkosh reputation for proven performance and reliability. It is also backed by elite Oshkosh service capabilities – worldwide logistics support including replacement parts, maintenance, and training and factory-trained technicians available anytime, anywhere – in field or in garrison.

Oshkosh Defense understands the needs of today's soldiers and responds with some of the best performing vehicles on earth. The 4 x 4 Lightweight Cargo Truck is one of them.

Axle Configuration: 4 x 4
Unladen Weight: 19,663 lbs. (8919 kg)
Unladen with Armor Weight: 23,693 lbs. (10747 kg)
Engine: Caterpillar C7 • 224kW, 1166N-m (300bhp, 860 ft-lb)
Transmission: Allison 3500SP
Transfer Case: Oshkosh® 30000 • 1.452:1 Ratio
Axles: AxleTech Series 4000 • Double Reduction
Suspension: Hendrickson Leaf Spring
Tires: 14.00R20 XZL (LR-M) Michelin

Cab: MTVR size • Right-hand steer • Euro-compliant controls
air-ride seats • foldable for air/rail transport
Pintle Hook: Wallace Forge – 110,231 lbs. (50000 kg)
Max Gross Weight Rating – 2,205 lbs. (1000 kg) Max Vertical Load
Air Compressor: Bendix 921 Turbo Boosted • 764 l/min (27cfm)
SRW (optional): Front and rear deploy
dp winch, 20,000 lbs. (9072 kg) line pull
Tray Body: Weight – 1,543 lbs. (700 kg)
Length – 170 in. (4318 mm)

