

## REMOVAL - REFITTING : FRONT MUD GUARD :

### 1. Recommended tools

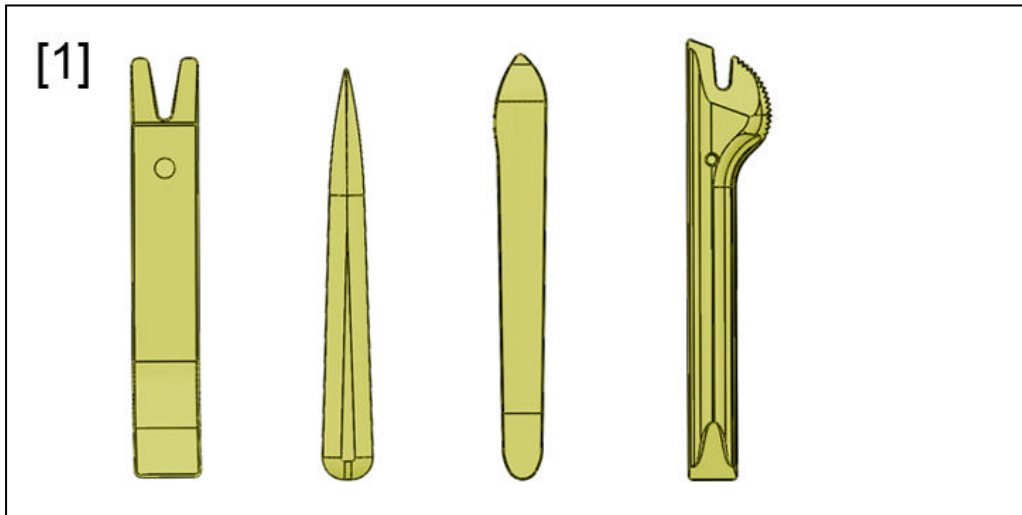


Figure : E5AP30WD

[1] Stripping tool (-).1350-ZZ .

### 2. Removal

#### 2.1. On the driver's side

Place the vehicle on a 2 -post lift .  
Remove the front wheels .



Unclip the clips (3) ; Using the tool [1] .

Remove :

- The bolts (2)

- The mud shield (1)

## 2.2. Passenger's side

Proceed in the same way to remove the splash shield on the passenger's side .

## 3. Refitting

Proceed in the reverse order to removal .

Fit the wheels ; Tightening to  $10 \pm 1$  daN.m .

**N.B.** : [Check the condition of the securing clips ; Replace if necessary .](#)