REMOVAL - REFITTING : FRONT BUMPER CAPPING :

1. Removal

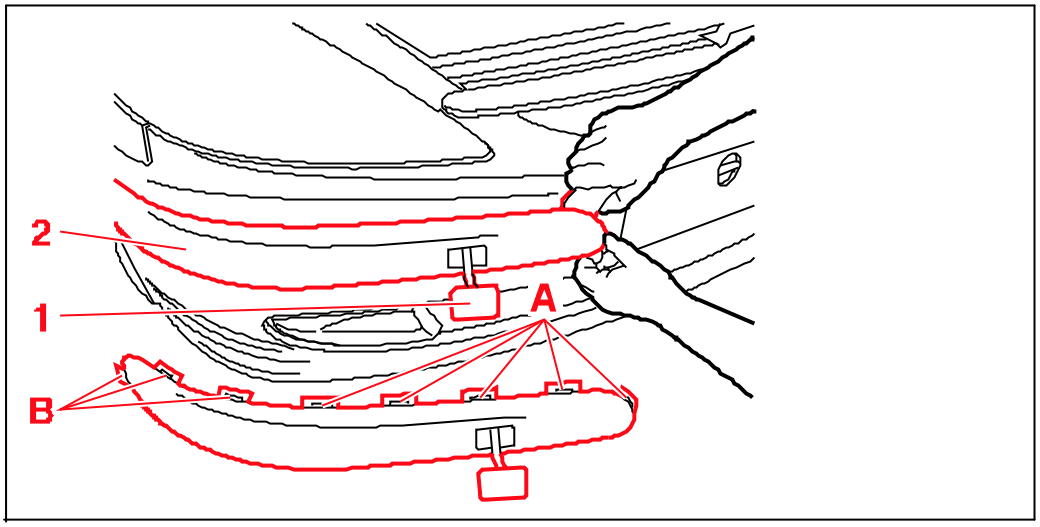


Figure : C4AK05RD

Right side : Release the lashing access flap (1) .
On both sides : Using a spatula, begin removal of the strip by unclipping the clips (A), taking care not to damage the bumper paint .
Unclip the clips (B) .
Remove the surround (2) .

2. Refitting

Proceed in the reverse order to removal .
Ensure that the strip is clipped correctly .