Figure : C4AK05ZD

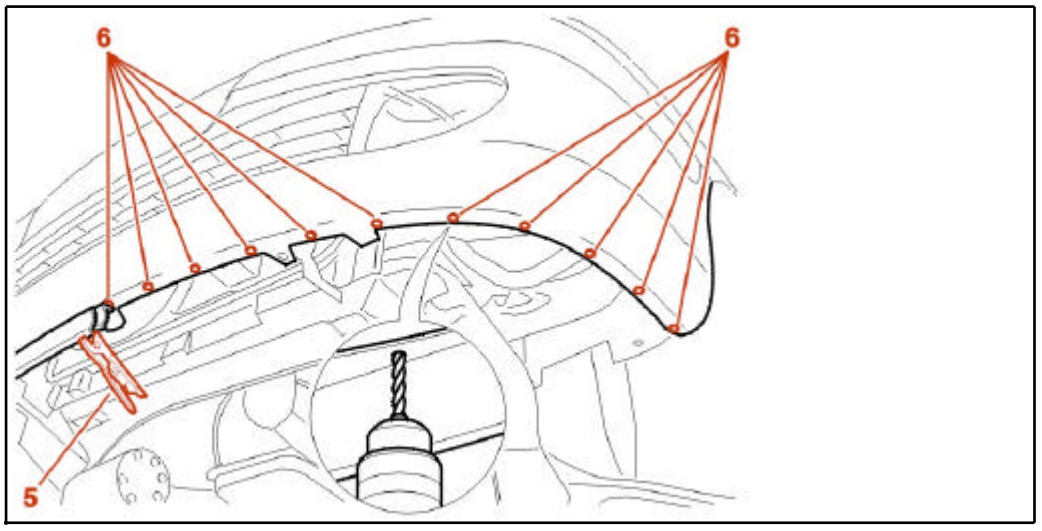


Figure : C4AK060D

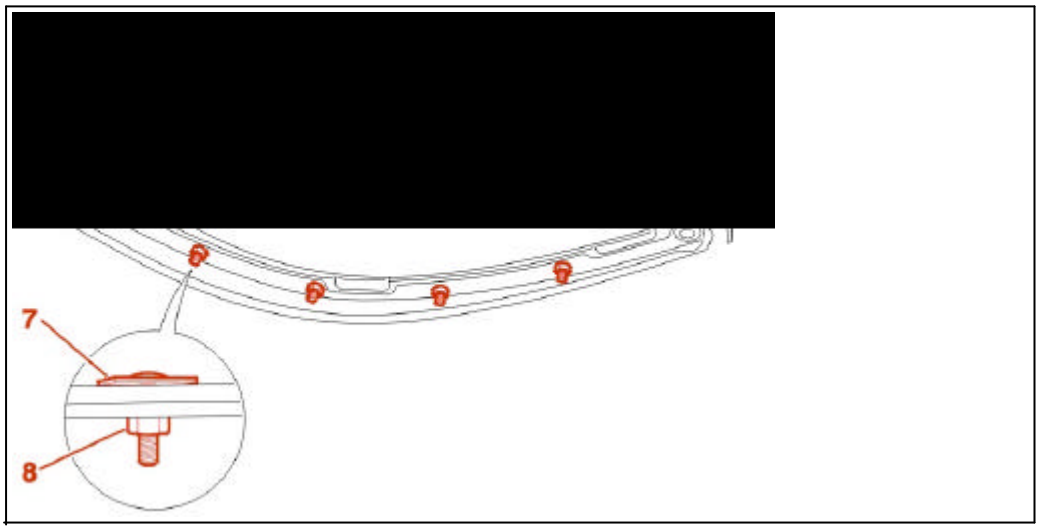


Figure : C4AK061D

Position bolt plates (7) (part no. 6985.15) and flanged nuts (8) (part no. 6936.95) (As indicated) .
Tighten the nuts (8) .
Continue the fitting operations in the reverse order to removal .