

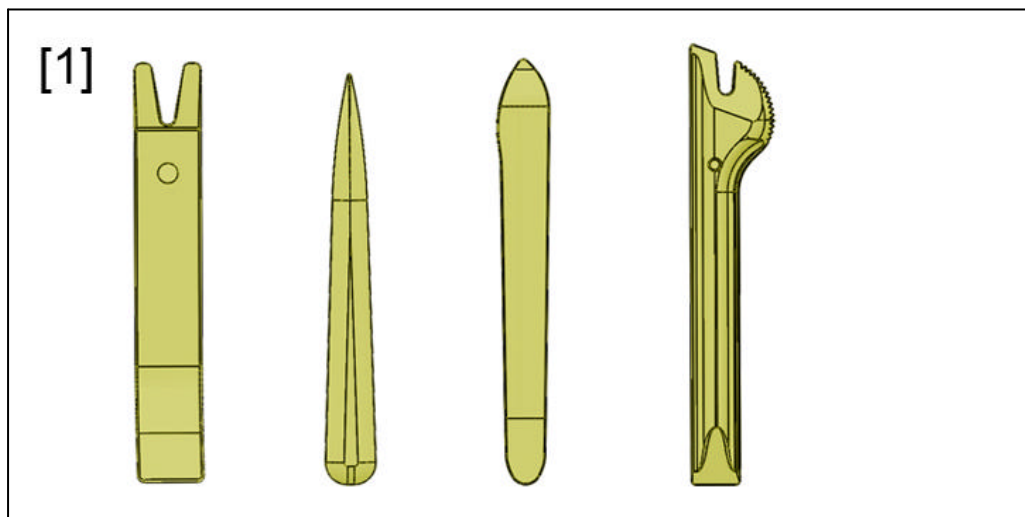
DISMANTLING - ASSEMBLY : FRONT BUMPER :*COUPE CABRIOLET - 2 DOOR OR 5 DOOR ESTATE***1. Recommended tools**

Figure : E5AP30WD

[1] Stripping tool (-).1350-ZZ .

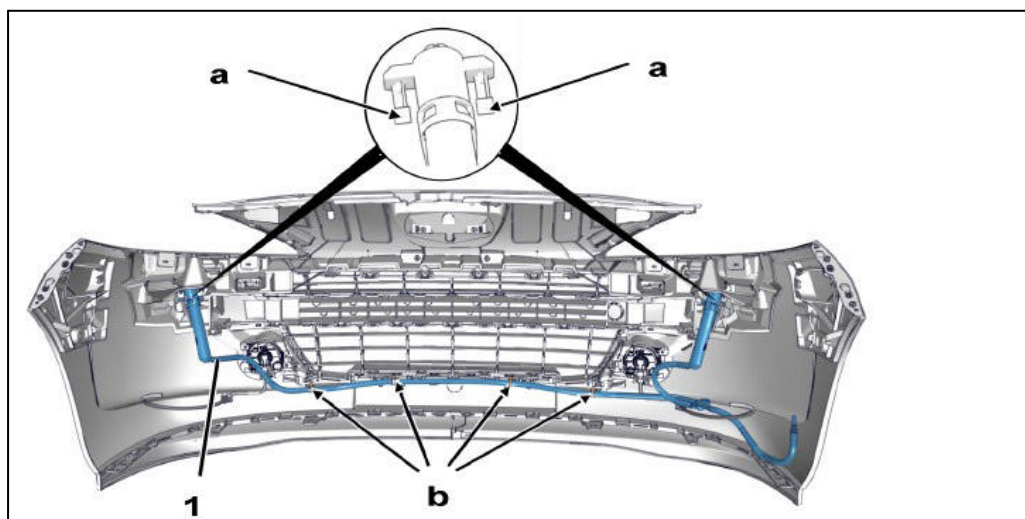
2. Preliminary operation**Remove the front bumper** ⓘ .**3. Dismantling****3.1. Headlamp wash****N.B. :** According to specification .

Figure : C4AM02BD

Remove the headlamp washer jets and trim assembly ⓘ (Carry out the operation symmetrically) .

Unclip :

- The fasteners (At "b")
- The headlight washer (At "a") (On each side)

Remove the headlamp washer assembly with its pipe (1) .

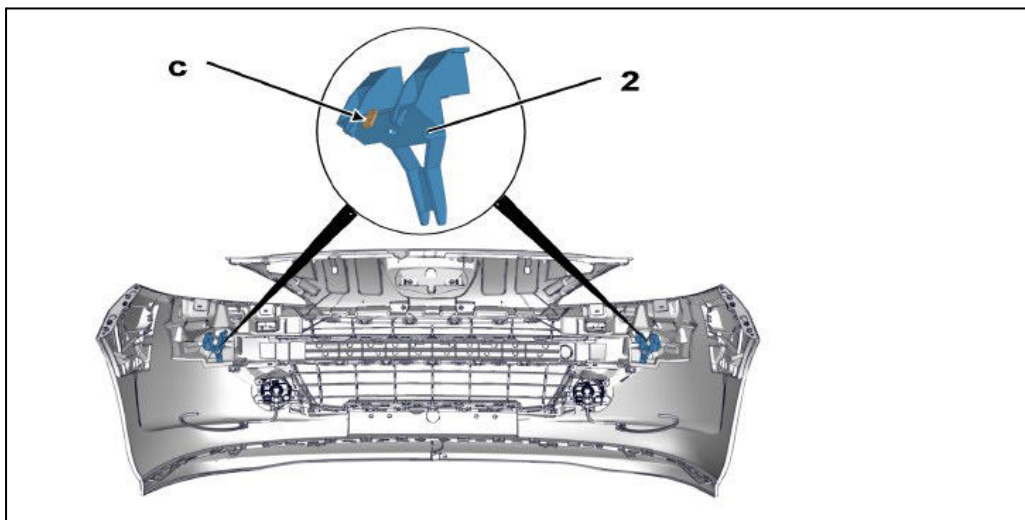


Figure : C4AM02CD

Unclip the headlamp washer support (2) (At "c") .

Remove the headlamp washer support (2) .

3.2. Fog lamps (At the front)

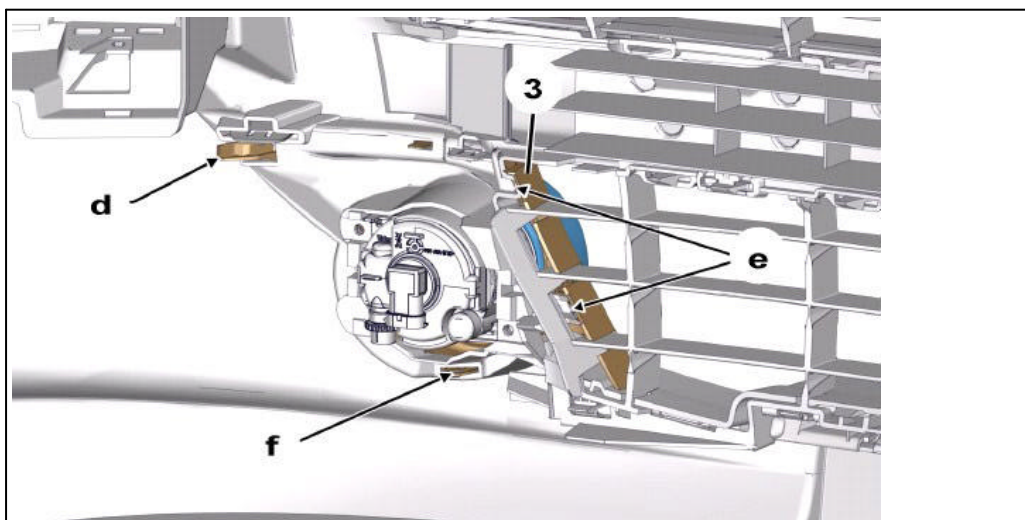


Figure : C5JM00ED

Unclip : The front fog lamp trim (3) (At "d", "e", "f") .

Remove : The front fog lamp trim (3) .

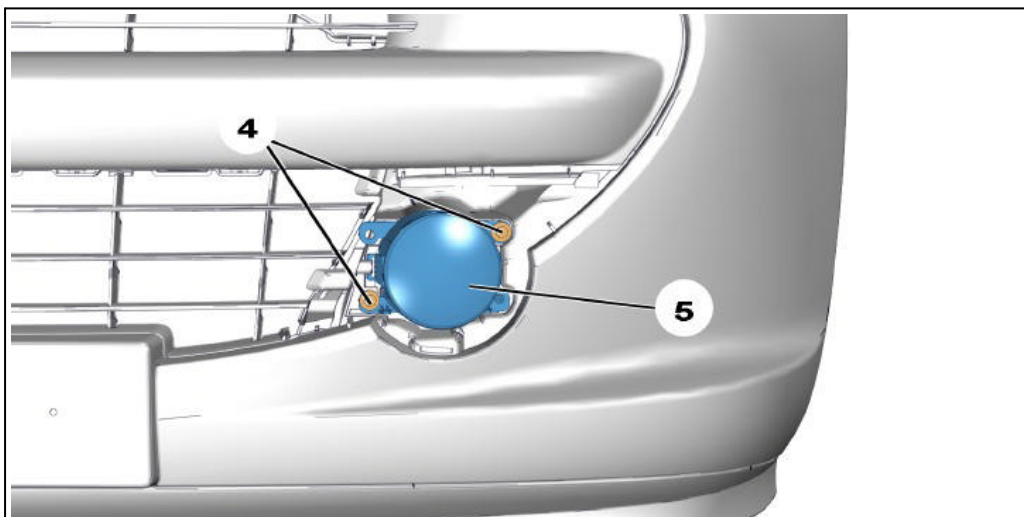


Figure : C5JM002D

Remove :

- The bolts (4)
- The front fog lamp (5)

N.B. : Repeat these operations for the other side .

3.3. Badge

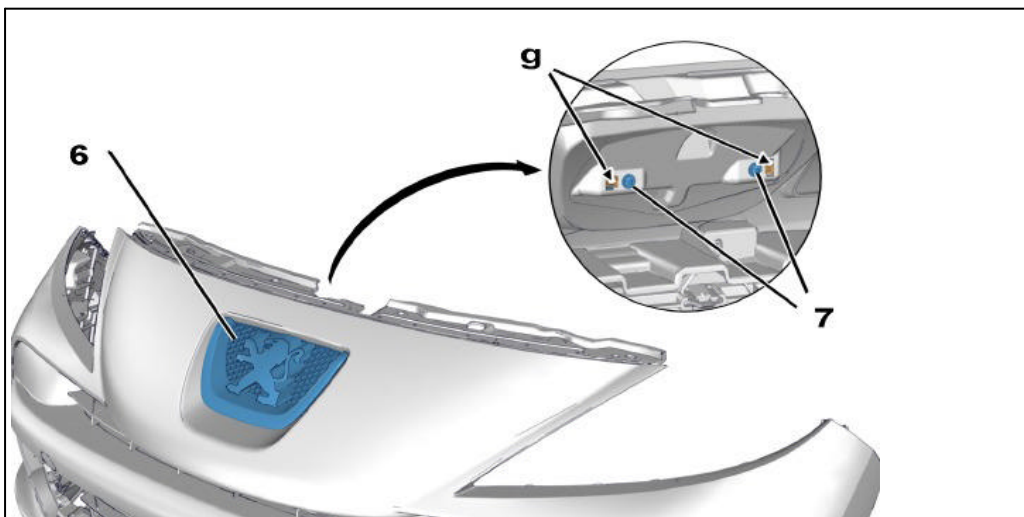


Figure : C4AM02DD

Remove the bolts (7) .

Unclip the marque badge (6) (At "g") .

Remove the marque badge (6) .

3.4. Front bumper deflectors

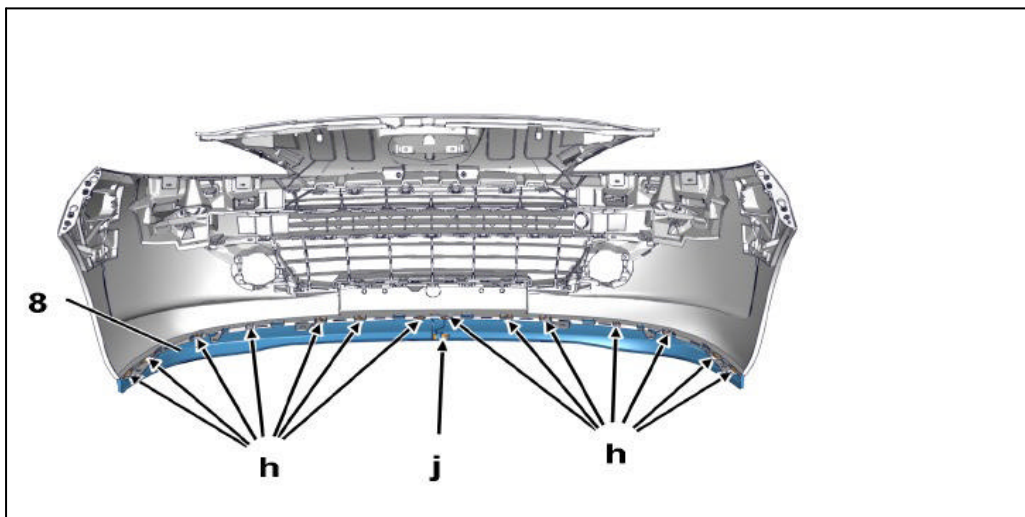


Figure : C4AM02ED

Unclip the front bumper deflector (8) (At "h", "j") .
Remove the front bumper deflector (8) .

3.5. Front bumper side fixing bracket

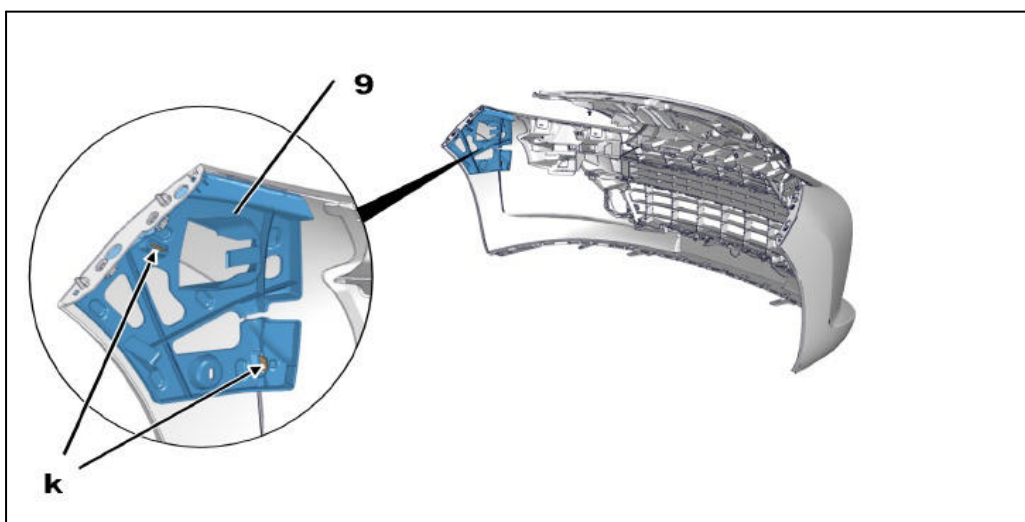


Figure : C4AM02FD

Cut or drill the snap rivets (At "k") .
Remove the front bumper side support (9) .

N.B. : Repeat these operations for the other side .

3.6. Front bumper lower grille

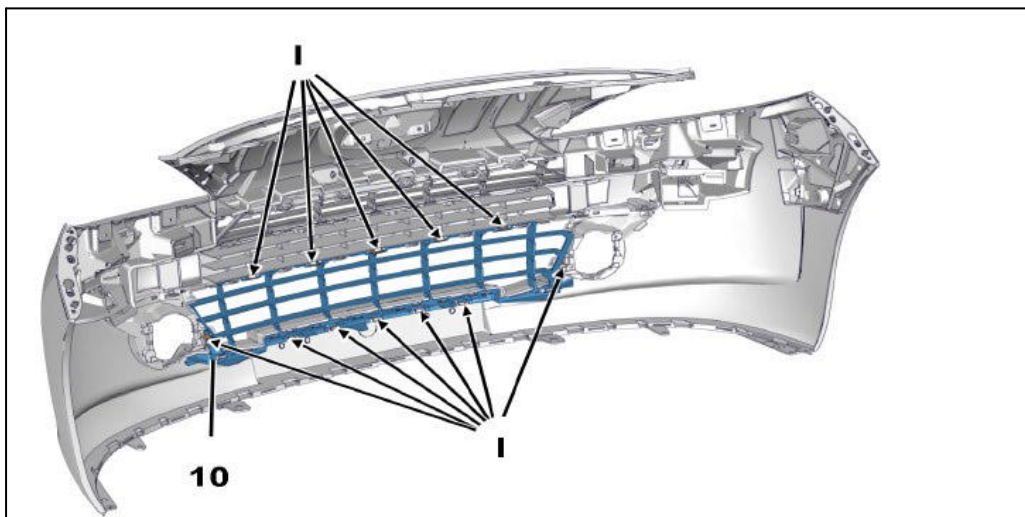


Figure : C4AM02GD

Unclip : The front bumper grille (10) (At "I") .

Remove : The front bumper grille (10) .

3.7. Front valance support

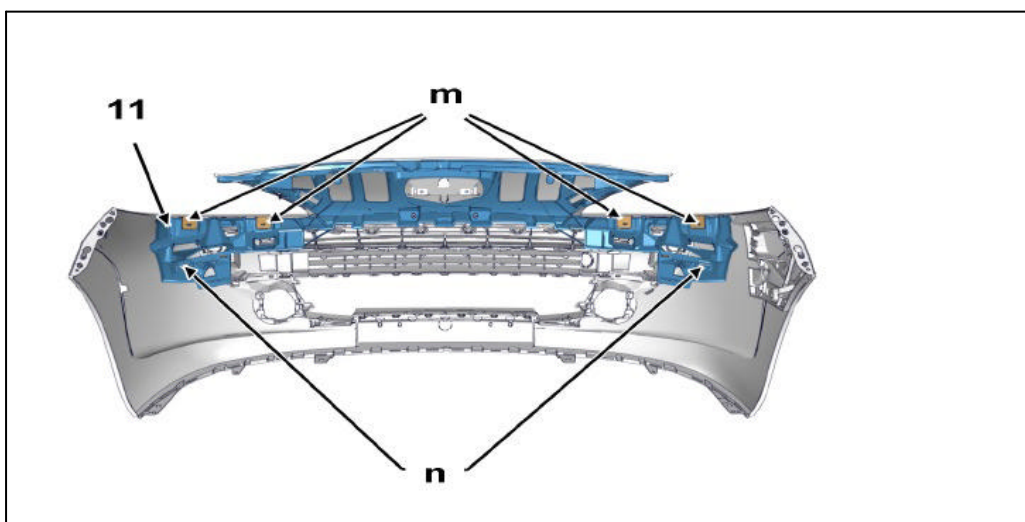


Figure : C4AM02HD

Cut or drill the snap rivets (At "n") (On each side) .

Unclip the front bumper skin (At "m") .

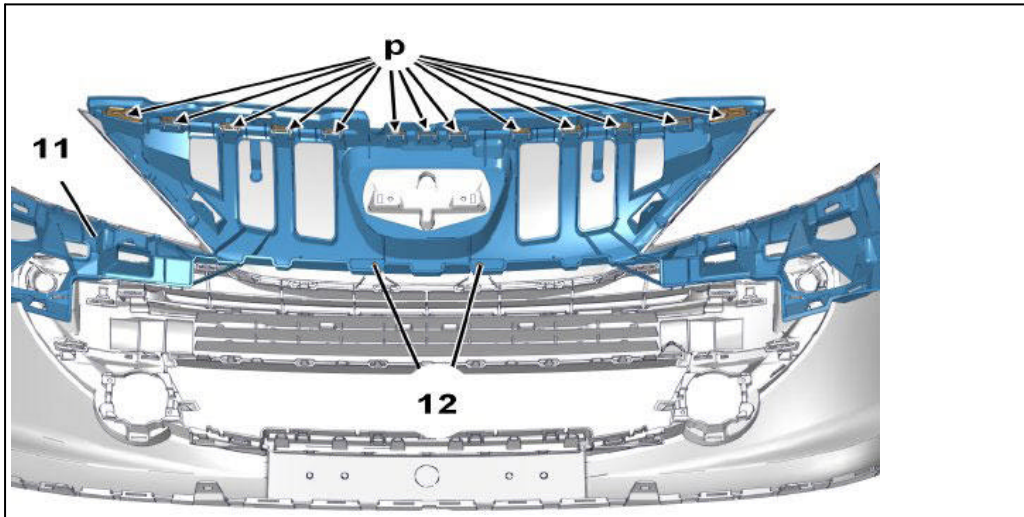


Figure : C4AM02JD

Remove the bolts (12) .

Unclip the front valance support (11) (At "p") .

Remove the front valance support (11) .

3.8. Front bumper upper grille

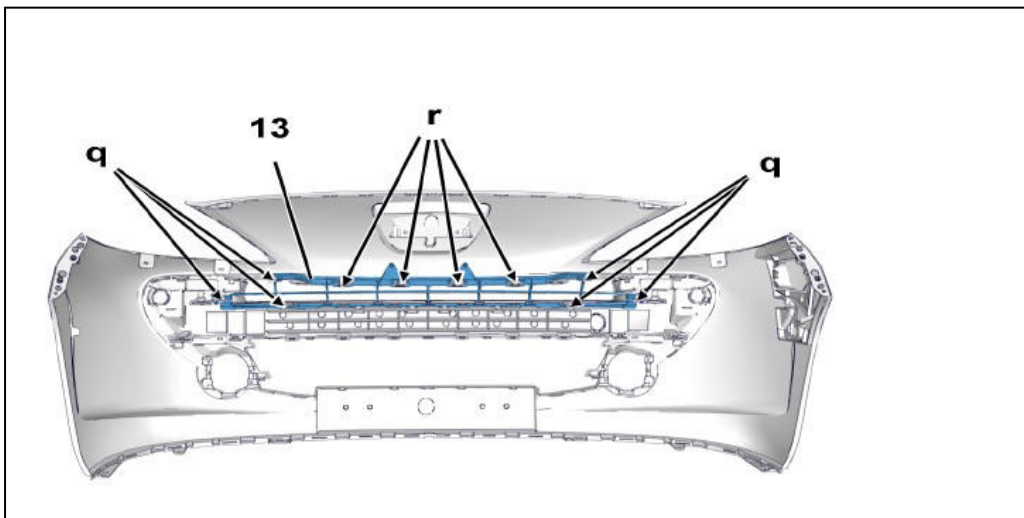


Figure : C4AM02KD

Cut or drill the bumper grille (13) snap rivets (At "q") (On each side) .

Unclip : The front bumper grille (13) (At "r") .

Remove : The front bumper grille (13) .

3.9. Front bumper capping

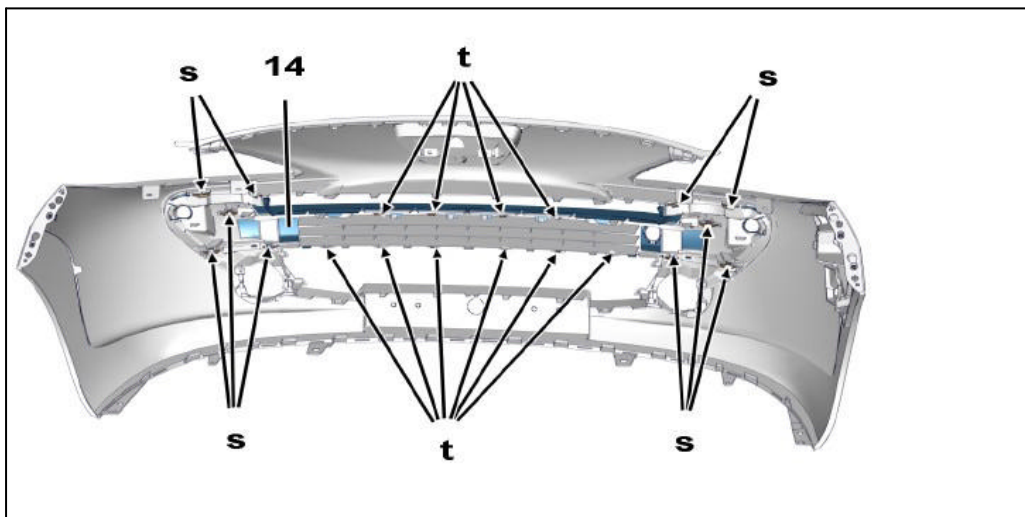


Figure : C4AM02LD

Unclip the front bumper capping (14) (At "s", "t") .

Remove the front bumper capping (14) .

Remove : The number plate .

4. Assembly

Proceed in the reverse order to removal .

URGENT : Use an approved repair kit for plastic bonding .

Snap rivet : The brackets (At "k","n","q") .

5. Additional operations

Refit the front bumper ⓘ .

Check the operation of the equipment .