

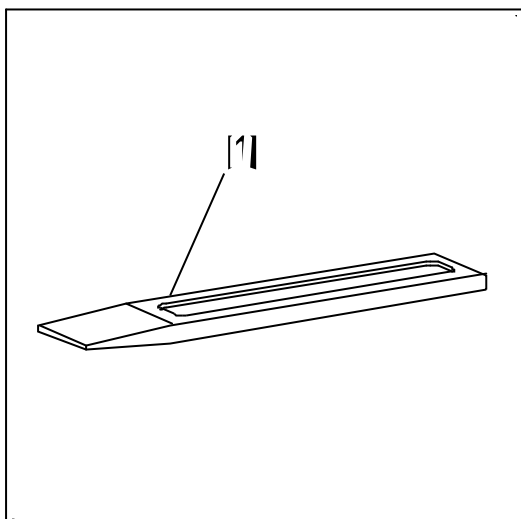
STRIP - REBUILD : FRONT BUMPER :**1. Tooling**

Figure : C5FK09WC

[1] Spatula (-).1350 .

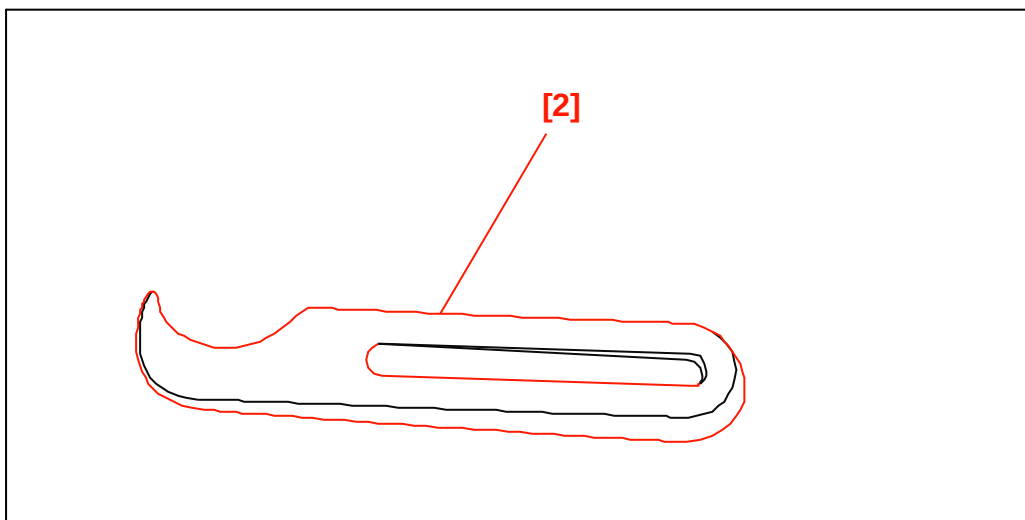


Figure : C4BK07BD

[2] Spatula (-).1327 .

2. Preliminary operations**Remove the front bumper** ⓘ .**3. Dismantling****3.1. Headlamp wash**

N.B. : According to specification .

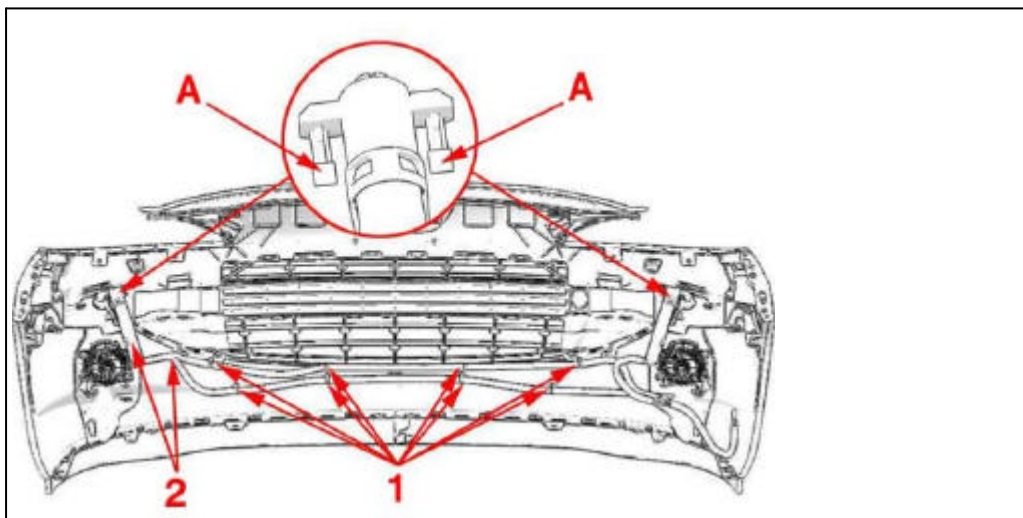


Figure : C5JK0R4D

Remove the headlamp washer jets and trim assembly ⓘ (On each side ⓘ) .

Unclip :

- The fasteners (1)
- The headlight washer (At (A) - On each side)

Remove the headlamp washer assembly with its pipe (2) .

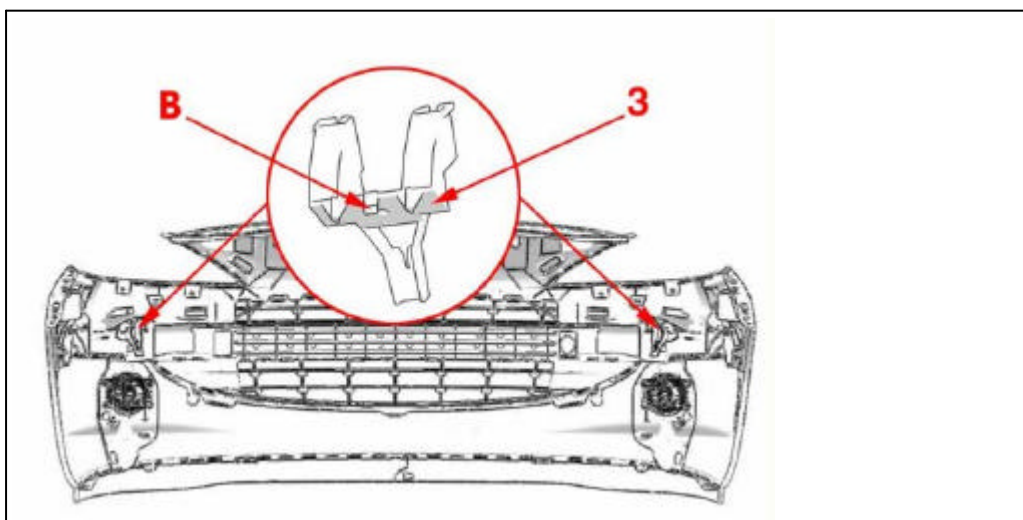


Figure : C5JK0R5D

Unclip the headlamp washer support (3) (At (B)) .

Remove the headlamp washer support (3) .

3.2. Front fog lamps

N.B. : According to specification .

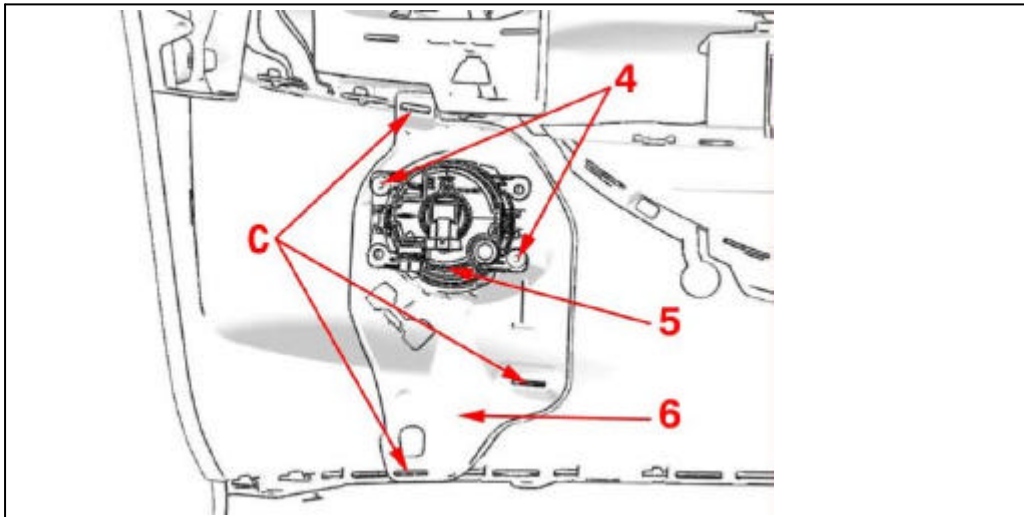


Figure : C5JK0R6D

Remove (On each side) :

- The bolts (4)
- Front fog lamps (5)

On each side :

- Cut or drill the snap rivets (At (C))
- Remove the front fog lamp support (6)

3.3. Badge

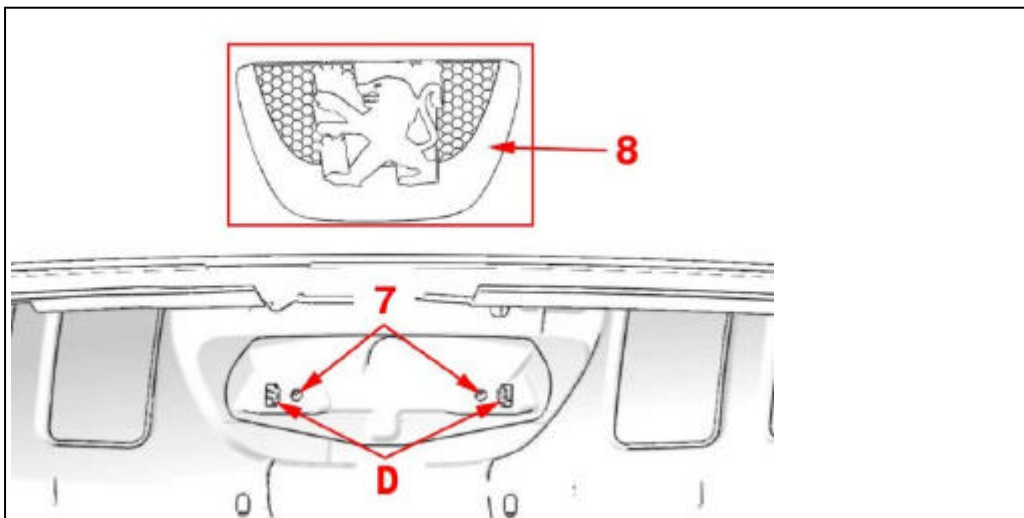


Figure : C5JK0R7D

Remove the bolts (7) .

Unclip the marque badge (8) (At (D)) .

Remove the marque badge (8) .

3.4. Front bumper deflectors

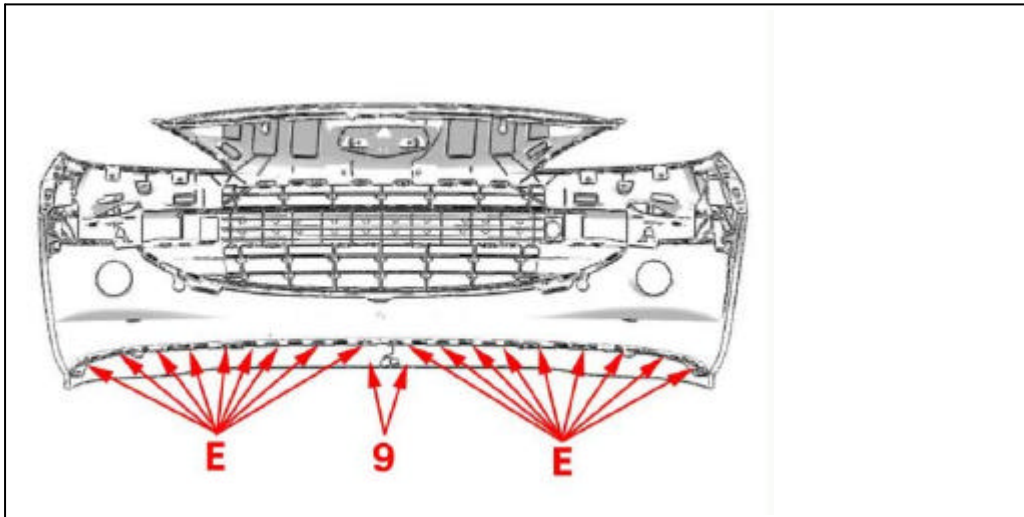


Figure : C5JK0R8D

Unclip the front bumper deflectors (9) (At (E)) .
Remove the front bumper deflectors (9) .

3.5. Front bumper side fixing bracket


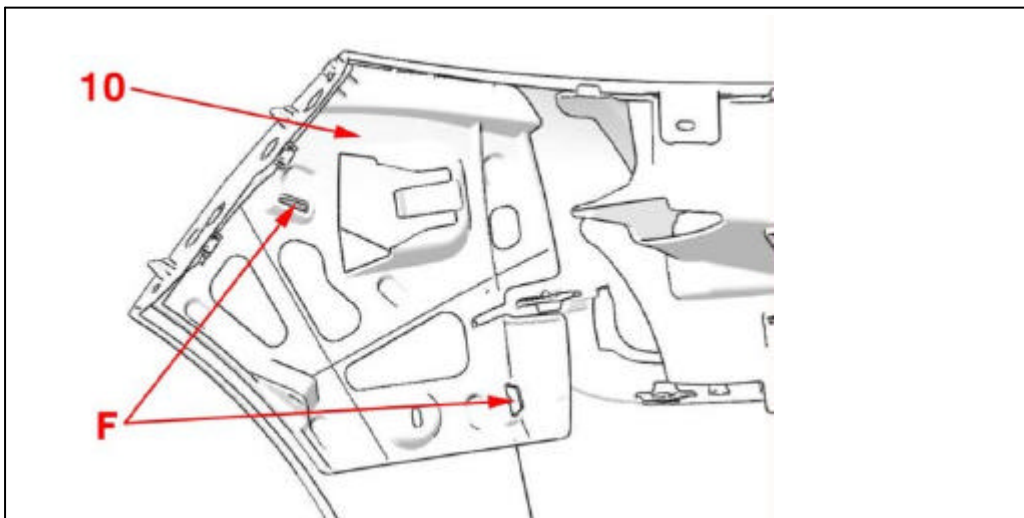


Figure : C5JK0R9D

On each side :

- Cut or drill the snap rivets (At (F))
- Remove the front bumper side support (10)

3.6. Front bumper capping

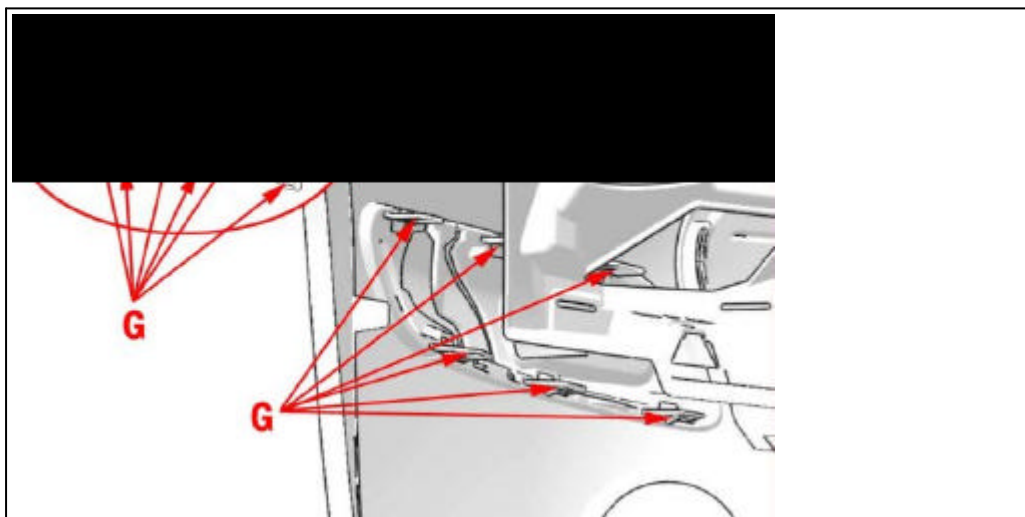

On each side :

- Unclip the front bumper capping (11) (At (G) - Using the tools [1 - 2])
- Remove the front bumper capping (11)

3.7. Front valance support

Figure C5JK0RBD

Cut or drill the snap rivets (At (H) - On each side) .

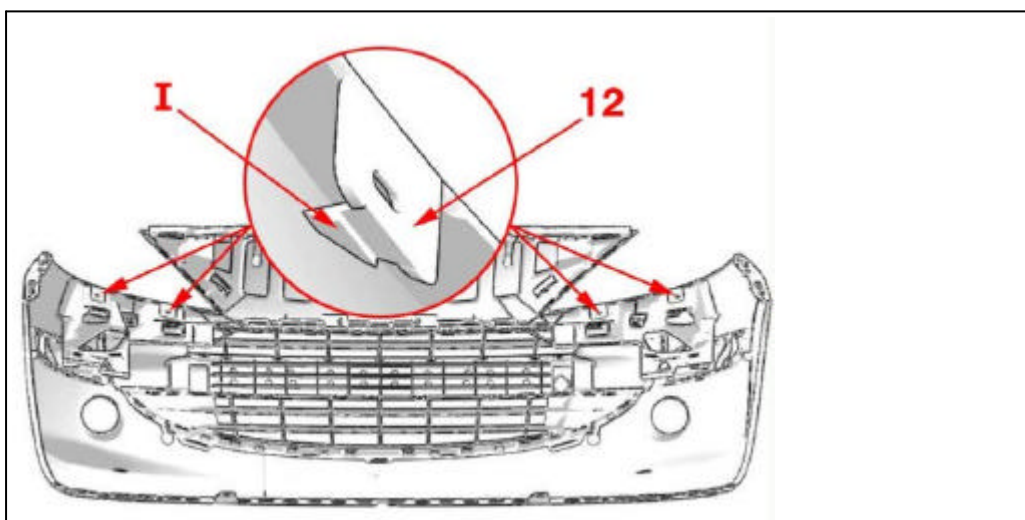


Figure : C5JK0RCD

Unclip the front bumper skin (12) (At (I)) .

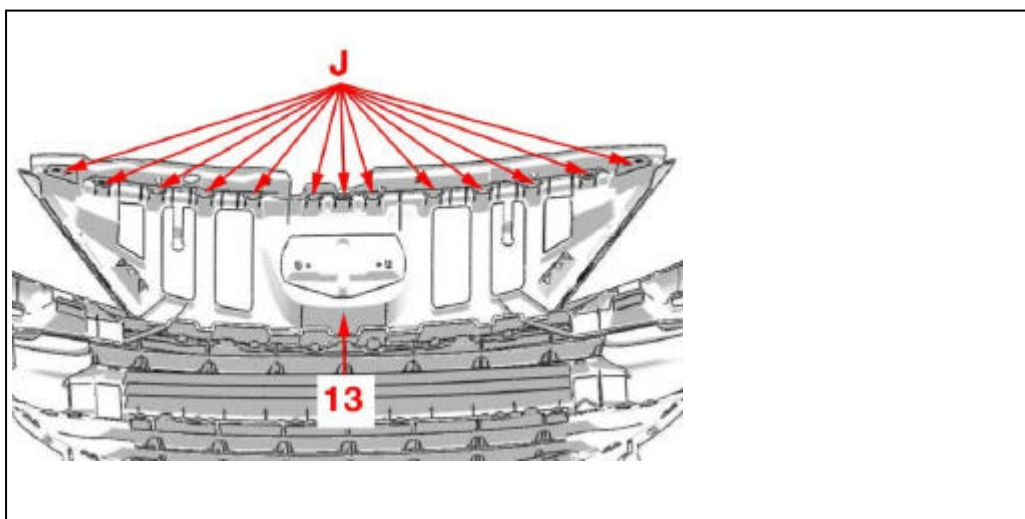


Figure : C5JK0RDD

Unclip the front valance support (13) (At (J)) .

Remove the front valance support (13) .

3.8. Bumper grille

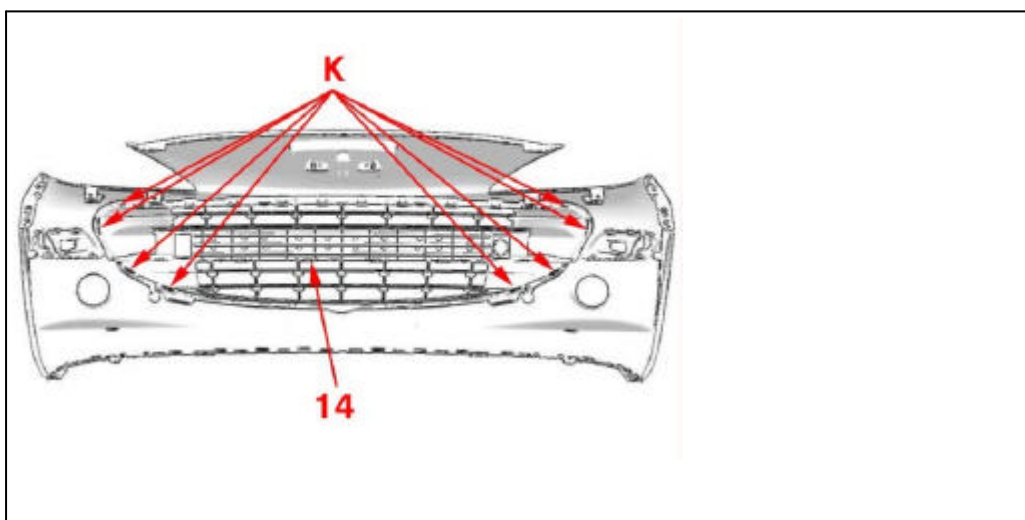


Figure : C5JK0RED

Cut or drill the bumper grille (14) snap rivets (At (K) - On each side) .

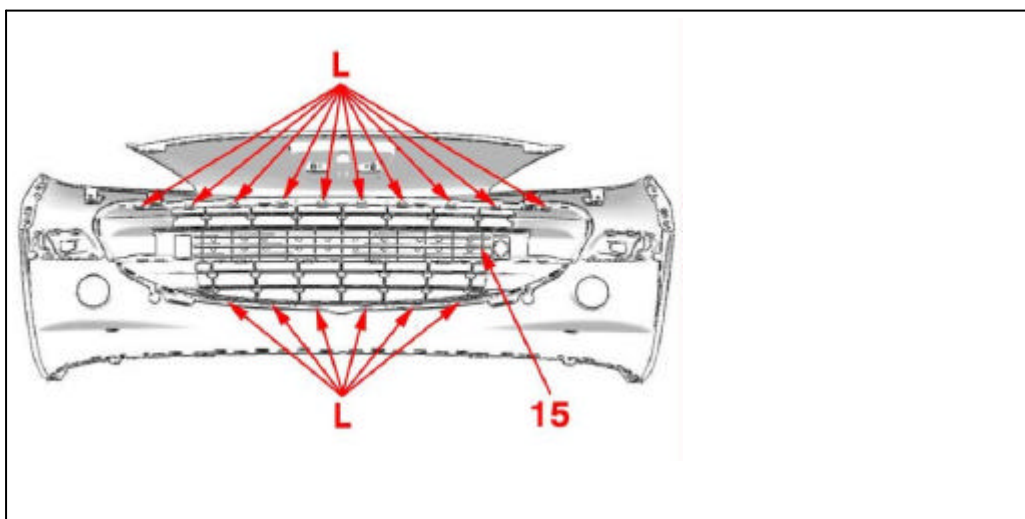


Figure : C5JK0RFD

Unclip the front bumper grille (15) (At (L)) .
Remove the front bumper grille (15) .

4. Refit

Proceed in the reverse order to removal .

N.B. : Rivet all of the fixing clips (At (C - F - H - K)) .

5. Additional operations

Refit the front bumper ⓘ .

Check the operation of the equipment .