
TIRE SIZE			RIM SIZE / Offset(ET)			TIRE SIZE			RIM SIZE / Offset(ET)		
185	/ 65	- 15	X 6.0	ET	23	205	/ 50	- 16	X 7.0	ET	25

Shop Wheels
- by car
- by specs
- by brand

Shop Tires
- by car
- by size
- by brand

Tools
- Fitment Guide
- Finishes Guide
- Photo Gallery
- Photochopper
- Fitment Check
- Plus Sizing
- Size Comparer

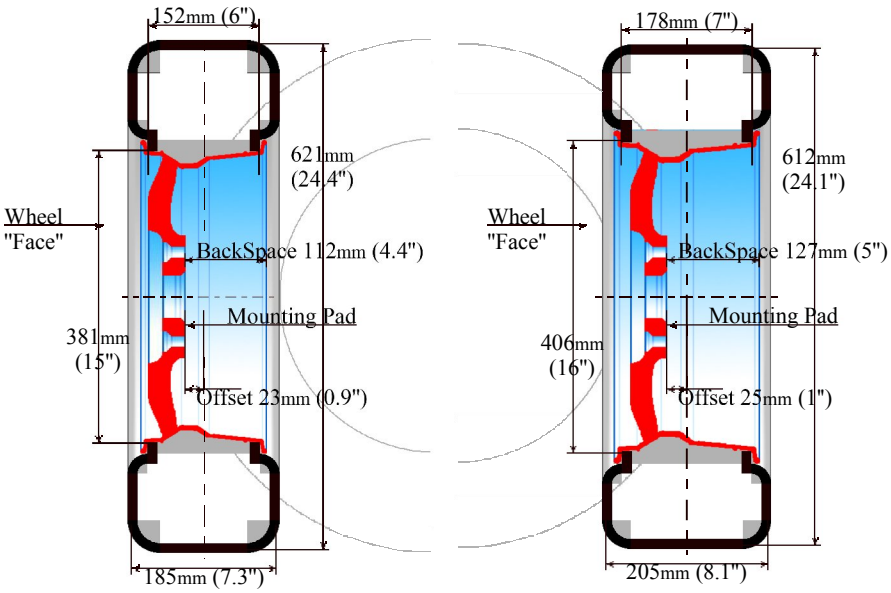

Save this setup in your Favorites Add comments (optional):

-chart 1 chart 2-

Wheels:	Wheel 1	Wheel 2
Wheel size	15x6 ET 23	16x7 ET 25
BackSpace	111 mm (4.4")	126 mm (5") 15 mm (0.6") deeper.
Rim Lip		11 mm (0.4") wider
Typical Weight	~ 14 lbs / 6 kg	~ 18 lbs / 8 kg
Tires:	**Tire 1**	**Tire 2**
Tire size	185/65-15	205/50-16
Section width	185 mm (7.3")	205 mm (8.1")
Sidewall	120 mm (4.7")	103 mm (4.1")
Tire diameter	621 mm (24.4")	612 mm (24.1") 9 mm (1.4%) shorter.
Rim sizes	15x4.5 to 15x7	16x5.5 to 16x7.5
Circumference	1950 mm (76.8")	1922 mm (75.7")
Revs per mile	825.3	837.5
Speedometer	Assuming that this is OEM tire and speedometer readings are correct	When speedometer reads 60mph (96.6km/h) actual speed will be 59.1mph (95.2km/h): 1.5% slower.
Typical Weight	~ 21 lbs / 9 kg	~ 20 lbs / 9 kg
Wheel+Tire Weight	~ 35 lbs / 15 kg	~ 38 lbs / 17 kg
Clearance:	**Package 1**	**Package 2**
Suspension	Assuming that this is OEM wheel/tire and there is no any problems with clearance on both sides	Package is 12 mm (0.5") closer to suspension/brakes components. Acceptable for most cars.
Fenders		Package will stick out 8 mm (0.3") farther. Acceptable for most cars.
Wheelwells		100% clear (leaves even more room than OEM)

We ship WORLDWIDE
Se habla Español
Мы говорим по-Русски

* Our wheel/tire packages come mounted and balanced, with all necessary hardware included, completely ready to bolt on. **No extra expenses required.**

* All recommended ("Direct fit") packages are backed up by our Fitment Guarantee.

* Multiple payment options, including PayPal

***TPMS sensors** are available..

* Questions? Talk to experts: **1-877-558-4737** (Mon-Fri,9am-5pm PST)

Copyright @ 2005 1000Rims